TERMINOLOGY
Terminals-as-a-Service

W LINE

W-Q3minUPT
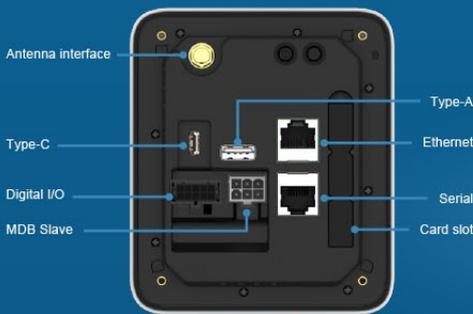## Unattended Payment Terminal

PAY **Wide range of payment types:**
Credit, Debit, Closed-loop, Pre-paid

Omni-channel payment:
Chip insert, Contactless tap, E-wallet, Barcode scan

Certifications:
PCI PTS, TQM, SRED, RoHs, FCC, CE
EMV L1 & L2, EMV CL L1 PayPass, PayWave,
ExpressPayD-PAS, Interac Flash L2, Jspeedy

Remote management:
Integrated terminal management system(TMS)

Integration options:
Semi-integration with developer-friendly SDKs + APIs,
All-in-one with apps running locally on the device

Antenna interface
Type-C
Digital I/O
MDB Slave
Type-A
Ethernet
Serial
Card slot

Q3 UPT MSR (Optional)

This document is not binding and the specifications above may be modified without prior notification.

OS Platform	**CPU**	**Memory**	**Display**	**Card Slot**
Secure Android 14	Qualcomm Quad-Core @ 2.0GHz	2GB RAM + 32GB Flash, 4GB RAM + 32GB Flash (Optional)	4" TFT 480 x 480, IPS, covered with Panda Glass	SIM Slot x1, PSAM Slot x1, TF Slot x1,
Security	**NFC Contactless**	**Chip card reader**	**MSR (Optional)**	**Camera**
PCI PTS certified	ISO 14443 Type A & B MIFARE Sony Felica	ISO 7816	ISO 7811, Track 1/2/3, bi-direction	1D & 2D barcode scanning
GPS	**Ports**	**Communication**	**Power**	**Dimensions (L*W*H)**
GPS	MDB Slave x1, RS232 x1, Digital IO port x1, Ethernet x1, USB-C x1, USB-A x1,SMA x1,	WiFi 2.4/5GHz, BT 5.0, GSM, 3G, 4G LTE, eSIM supported	7V - 48V DC via MDB slave	119.3x 102 x 48.23 mm (4.69 x 4.01 x 1.9 inches)
Total Weight	**Environment**	**Cradle (Optional)**	**Buttons**	
310 g (0.68 lb)	IP 65 dust /waterproof rating IK 10 vandal-proofing -35°C ~ 60°C operating temp	NAMA standard EVA EPS standard mounting plate DEX Cable	Reset Key x1 Service Key x1	